

# **Synchronization Without Contention**

*John Mellor-Crummey*  
*Michael Scott*

**CRPC-TR91130**  
**April, 1991**

Center for Research on Parallel Computation  
Rice University  
P.O. Box 1892  
Houston, TX 77251-1892



# Synchronization Without Contention\*

John M. Mellor-Crummey<sup>†</sup>  
(johnmc@rice.edu)

Center for Research on Parallel Computation  
Rice University, P.O. Box 1892  
Houston, TX 77251-1892

Michael L. Scott<sup>‡</sup>  
(scott@cs.rochester.edu)  
Computer Science Department  
University of Rochester  
Rochester, NY 14627

April 1991

## Abstract

Conventional wisdom holds that contention due to busy-wait synchronization is a major obstacle to scalability and acceptable performance in large shared-memory multiprocessors. We argue the contrary, and present fast, simple algorithms for contention-free mutual exclusion, reader-writer control, and barrier synchronization. These algorithms, based on widely available `fetch_and_Φ` instructions, exploit local access to shared memory to avoid contention. We compare our algorithms to previous approaches in both qualitative and quantitative terms, presenting their performance on the Sequent Symmetry and BBN Butterfly multiprocessors. Our results highlight the importance of local access to shared memory, provide a case against the construction of so-called “dance hall” machines, and suggest that special-purpose hardware support for synchronization is unlikely to be cost effective on machines with sequentially consistent memory.

## 1 Introduction

Busy-waiting synchronization, including locks and barriers, is fundamental to parallel programming on shared-memory multiprocessors. Busy waiting is preferred over scheduler-based blocking when scheduling overhead exceeds expected wait time, when processor resources are not needed for other tasks (so that the lower wake-up latency of busy waiting need not be balanced against an

---

\*This paper appeared in *Proc. of the 4th International Conference on Architectural Support for Programming Languages and Operating Systems*, pages 269–278, Santa Clara, CA, April 1991. Permission to copy without fee all or part of this material is granted provided that the copies are not made or distributed for direct commercial advantage, the ACM copyright notice and the title of the publication and its date appear, and notice is given that copying is by permission of the Association for Computing Machinery. To copy otherwise, or to republish, requires a fee and/or specific permission.

<sup>†</sup>Supported in part by the National Science Foundation under Cooperative Agreement number CCR-9045252.

<sup>‡</sup>Supported in part by the National Science Foundation under Institutional Infrastructure grant CDA-8822724.

opportunity cost), or in the implementation of an operating system kernel where scheduler-based blocking is inappropriate or impossible.

Because busy-wait mechanisms are often used to protect or separate very small critical sections, their performance is a matter of paramount importance. Unfortunately, typical implementations of busy waiting tend to produce large amounts of memory and interconnection network contention, introducing performance bottlenecks that become markedly more pronounced in larger machines and applications. When many processors busy-wait on a single synchronization variable, they create a *hot spot* that gets a disproportionate share of the network traffic. Pfister and Norton [22] showed that the presence of hot spots can severely degrade performance for all traffic in multistage interconnection networks, not just traffic due to synchronizing processors. Agarwal and Cherian [2] found that references to synchronization variables on cache-coherent multiprocessors cause cache line invalidations much more often than non-synchronization references. They also observed that synchronization accounted for as much as 49% of network traffic in simulations of a 64-processor “dance hall” machine, in which each access to a shared variable traverses the processor-memory interconnection network.

Pfister and Norton [22] argue for message combining in multistage interconnection networks. They base their argument primarily on anticipated hot-spot contention for locks, noting that they know of no quantitative evidence to support or deny the value of combining for general memory traffic. (Hardware combining appears in the original designs for the NYU UltraComputer [10], the IBM RP3 [21], and the BBN Monarch [24].) Other researchers have suggested adding special-purpose hardware solely for synchronization, including synchronization variables in the switching nodes of multistage interconnection networks [14] and lock queuing mechanisms in the cache controllers of cache-coherent multiprocessors [9, 20]. The principal purpose of these mechanisms is to reduce contention caused by busy waiting. Before adopting them, it is worth considering the extent to which software techniques can achieve a similar effect.

Our results indicate that the cost of synchronization in systems without combining, and the impact that synchronization activity will have on overall system performance, is much less than previously thought. This paper describes novel algorithms that use distributed data structures to implement protocols for busy-wait synchronization. All that our algorithms require in the way of hardware support is a simple set of `fetch_and_Φ` operations<sup>1</sup> and a memory hierarchy in which each processor is able to read some portion of shared memory without using the interconnection network. By allocating data structures appropriately, we ensure that each processor busy waits only on *locally-accessible* variables on which no other processor spins, thus eliminating hot-spot contention caused by busy waiting. On a machine in which shared memory is distributed (*e.g.*, the BBN Butterfly [4], the IBM RP3 [21], or a shared-memory hypercube [6]), a processor busy waits only on flag variables located in its local portion of the shared memory. On a machine with coherent caches, a processor busy waits only on flag variables resident in its cache; flag variables for different processors are placed in different cache lines, to eliminate false sharing.

The implication of our work is that efficient synchronization algorithms can be constructed *in software* for shared-memory multiprocessors of arbitrary size. Special-purpose synchronization hardware can offer only a small constant factor of additional performance for mutual exclusion, and at best a logarithmic factor for barrier synchronization.<sup>2</sup> In addition, the feasibility and performance of busy-waiting algorithms with local-only spinning provides a case against “dance-hall” architectures, in which shared memory locations are equally far from all processors.

<sup>1</sup>A `fetch_and_Φ` operation [15] reads, modifies, and writes a memory location atomically. Common `fetch_and_Φ` operations include `test_and_set`, `fetch_and_store` (swap), `fetch_and_add`, and `compare_and_swap`.

<sup>2</sup>Hardware combining can reduce the time to achieve a barrier from  $O(\log P)$  to  $O(1)$  steps if processors happen to arrive at the barrier simultaneously.

We present scalable algorithms for mutual exclusion spin locks, reader-writer spin locks, and multi-processor barriers in section 2. We relate these algorithms to previous work in section 3, and present performance results in section 4 for both a distributed shared-memory multiprocessor (the BBN Butterfly 1), and a machine with coherent caches (the Sequent Symmetry Model B). Our architectural conclusions are summarized in section 5.

## 2 Scalable Synchronization

In this section we present novel busy-wait algorithms for mutual exclusion, reader-writer control, and barrier synchronization. All are designed to use local-only spinning. The reader-writer lock requires atomic `fetch_and_store (xmem)`<sup>3</sup> and `compare_and_swap`<sup>4</sup> instructions. The mutual-exclusion lock requires `fetch_and_store`, and benefits from the availability of `compare_and_swap`. The barrier requires nothing more than the usual atomicity of memory reads and writes.

Our pseudo-code notation is meant to be more-or-less self explanatory. Line breaks terminate statements (except in obvious cases of run-on), and indentation indicates nesting in control constructs. The keyword `shared` indicates that a declared variable is to be shared by all processors. This declaration implies no particular physical location for the variable, but we often specify locations in comments and/or accompanying text. The keywords `processor private` indicate that each processor is to have a separate, independent copy of a declared variable.

### 2.1 Mutual Exclusion

Our spin lock algorithm (called the MCS lock, after our initials):

- guarantees FIFO ordering of lock acquisitions;
- spins on locally-accessible flag variables only;
- requires a small constant amount of space per lock; and
- works equally well (requiring only  $O(1)$  network transactions per lock acquisition) on machines with and without coherent caches.

The MCS lock (algorithm 1) was inspired by the QOSB (Queue On Synch Bit) hardware primitive proposed for the cache controllers of the Wisconsin Multicube [9], but is implemented entirely in software. Like QOSB, our lock algorithm maintains a queue of processors requesting a lock; this organization enables each processor to busy wait on a unique, locally-accessible flag variable.

To use our locking algorithm, a process allocates a locally-accessible record containing a link pointer and a Boolean flag in a scope enclosing the calls to the locking primitives (each processor can use a single statically-allocated record if lock acquisitions are never nested). One additional private temporary variable is employed during the `acquire_lock` operation. Processors holding or waiting for the same lock are chained together by the links in the local records. Each processor spins on its own local flag. The lock itself contains a pointer to the record for the processor at the tail of the queue, or `nil` if the lock is not held. Each processor in the queue holds the address of the record for the processor behind it—the processor it should resume after acquiring and releasing

---

<sup>3</sup>`fetch_and_store(x,new) ≡ old := x-; x- := new; return old`

<sup>4</sup>`compare_and_swap(x,old,new) ≡  
cc := (x- = old); if cc then x- := new; fi; return cc`

```

type qnode = record
  next : ^qnode    // ptr to successor in queue
  locked : Boolean  // busy-waiting necessary
type lock = ^qnode // ptr to tail of queue

// I points to a queue link record allocated
// (in an enclosing scope) in shared memory
// locally-accessible to the invoking processor

procedure acquire_lock(L : ^lock; I : ^qnode)
  var pred : ^qnode
  I->next := nil      // initially, no successor
  pred := fetch_and_store(L, I) // queue for lock
  if pred != nil      // lock was not free
    I->locked := true // prepare to spin
    pred->next := I   // link behind predecessor
    repeat while I->locked // busy-wait for lock

procedure release_lock(L : ^lock; I : ^qnode)
  if I->next = nil      // no known successor
    if compare_and_swap(L, I, nil)
      return           // no successor, lock free
    repeat while I->next = nil // wait for succ.
  I->next->locked := false // pass lock

```

Algorithm 1: A queue-based spin lock with local-only spinning.

the lock. `compare_and_swap` enables a processor to determine whether it is the only processor in the queue, and if so remove itself correctly, as a single atomic action. The spin in `acquire_lock` waits for the lock to become free. The spin in `release_lock` compensates for the timing window between the `fetch_and_store` and the assignment to `pred->next` in `acquire_lock`. Both spins are local.

Alternative code for the `release_lock` operation, without `compare_and_swap`, appears in algorithm 2. Like the code in algorithm 1, it spins on locally-accessible, processor-specific memory

```

procedure release_lock(L : ^lock; I : ^qnode)
  var old_tail : ^qnode
  if I->next = nil      // no known successor
    old_tail := fetch_and_store(L, nil)
    if old_tail = I    // really no successor
      return
    // We accidentally removed some processors
    // from the queue and have to put them back.
    usurper := fetch_and_store(L, old_tail)
    // wait for pointer to victim list
    repeat while I->next = nil
    if usurper != nil
      // usurper in queue ahead of our victims
      // link victims after the last usurper
      usurper->next := I->next
    else // pass lock to first victim
      I->next->locked := false
    else // pass lock to successor
      I->next->locked := false

```

Algorithm 2: Code for `release_lock`, without `compare_and_swap`.

locations only, requires constant space per lock, and requires only  $O(1)$  network transactions regardless of whether the machine provides coherent caches. It does not guarantee FIFO ordering, however, and admits the theoretical possibility of starvation, though lock acquisitions are likely to

remain very nearly FIFO in practice. A correctness proof for the MCS lock appears in a technical report [18].

## 2.2 Reader-Writer Control

The MCS spin lock algorithm can be modified to grant concurrent access to readers without affecting any of the lock's fundamental properties. As with traditional semaphore-based approaches to reader-writer synchronization [7], we can design versions that provide fair access to both readers and writers, or that grant preferential access to one or the other. We present a fair version here. A read request is granted when all previous write requests have completed. A write request is granted when all previous read and write requests have completed.

Code for the reader-writer lock appears in algorithm 3. As in the MCS spin lock, we maintain a linked list of requesting processors. In this case, however, we allow a requester to read and write fields in the link record of its predecessor (if any). To ensure that the record is still valid (and has not been deallocated or reused), we require that a processor access its predecessor's record *before* initializing the record's next pointer. At the same time, we force every processor that has a successor to wait for its next pointer to become non-nil, even if the pointer will never be used. As in the MCS lock, the existence of a successor is determined by examining `L->tail`.

A reader can begin reading if its predecessor is a reader that is already active, but it must first unblock its successor (if any) if that successor is a waiting reader. To ensure that a reader is never left blocked while its predecessor is reading, each reader uses `compare_and_swap` to *atomically* test if its predecessor is an active reader, and if not, notify its predecessor that it has a waiting reader as a successor.

Similarly, a writer can proceed if its predecessor is done and there are no active readers. A writer whose predecessor is a writer can proceed as soon as its predecessor is done, as in the MCS lock. A writer whose predecessor is a reader must go through an additional protocol using a count of active readers, since some readers that started earlier may still be active. When the last reader of a group finishes (`reader_count = 0`), it must resume the writer (if any) next in line for access. This may require a reader to resume a writer that is not its direct successor. When a writer is next in line for access, we write its name in a global location. We use `fetch_and_store` to read and erase this location atomically, ensuring that a writer proceeds on its own if and only if no reader is going to try to resume it. To make sure that `reader_count` never reaches zero prematurely, we increment it *before* resuming a blocked reader, and before updating the next pointer of a reader whose reading successor proceeds on its own.

```

type qnode = record
  class : (reading, writing)
  next : ^qnode
  state : record
    blocked : Boolean    // need to spin
    successor_class : (none, reader, writer)
type lock = record
  tail : ^qnode := nil
  reader_count : integer := 0
  next_writer : ^qnode := nil

// I points to a queue link record allocated
// (in an enclosing scope) in shared memory
// locally-accessible to the invoking processor

```

```

procedure start_write(L : ^lock; I : ^qnode)
  with I^, L^
  class := writing; next := nil;
  state := [true, none]
  pred : ^qnode := fetch_and_store(&tail, I)
  if pred = nil
    next_writer := I
    if reader_count = 0 and
      fetch_and_store(&next_writer, nil) = I
      // no reader who will resume me
      blocked := false
  else
    // must update successor_class before
    // updating next
    pred->successor_class := writer
    pred->next := I
  repeat while blocked

```

```

procedure start_read(L : ^lock; I : ^qnode)
  with I^, L^
  class := reading; next := nil
  state := [true, none]
  pred : ^qnode := fetch_and_store(&tail, I)
  if pred = nil
    atomic_increment(reader_count)
    blocked := false // for successor
  else
    if pred->class = writing or
      compare_and_swap(&pred->state,
        [true, none], [true, reader])
      // pred is a writer, or a waiting
      // reader. pred will increment
      // reader_count and release me
      pred->next := I
      repeat while blocked
    else
      // increment reader_count and go
      atomic_increment(reader_count)
      pred->next := I
      blocked := false
  if successor_class = reader
    repeat while next = nil
      atomic_increment(reader_count)
      next->blocked := false

```

```

procedure end_write(L: ^lock; I : ^qnode)
  with I^, L^
  if next != nil or not
    compare_and_swap(&tail, I, nil)
    // wait until succ inspects my state
    repeat while next = nil
  if next->class = reading
    atomic_increment(reader_count)
  next->blocked := false

```



```

procedure end_read(L : ^lock; I : ^qnode)
  with I^, L^
    if next != nil or not
      compare_and_swap(&tail, I, nil)
      // wait until succ inspects my state
      repeat while next = nil
        if successor_class = writer
          next_writer := next
      if fetch_and_decrement(reader_count) = 1
        // I'm last reader, wake writer if any
        w : ^qnode :=
          fetch_and_store(&next_writer, nil)
        if w != nil
          w->blocked := false

```

Algorithm 3: A fair reader-writer lock with local-only spinning.

## 2.3 Barrier Synchronization

We have devised a new barrier algorithm that

- spins on locally-accessible flag variables only;
- requires only  $O(P)$  space for  $P$  processors;
- performs the theoretical minimum number of network transactions ( $2P - 2$ ) on machines without broadcast; and
- performs  $O(\log P)$  network transactions on its critical path.

To synchronize  $P$  processors, our barrier employs a pair of  $P$ -node trees. Each processor is assigned a unique tree node, which is linked into an arrival tree by a parent link, and into a wakeup tree by a set of child links. It is useful to think of these as separate trees, because the fan-in in the arrival tree differs from the fan-out in the wakeup tree.<sup>5</sup> A processor does not examine or modify the state of any other nodes except to signal its arrival at the barrier by setting a flag in its parent's node, and when notified by its parent that the barrier has been achieved, to notify each of its children by setting a flag in each of their nodes. Each processor spins only on flag variables in its own tree node. To achieve a barrier, each processor executes the code shown in algorithm 4.

Our tree barrier achieves the theoretical lower bound on the number of network transactions needed to achieve a barrier on machines that lack broadcast. At least  $P - 1$  processors must signal their arrival to some other processor, requiring  $P - 1$  network transactions, and must then be informed of wakeup, requiring another  $P - 1$  network transactions. The length of the critical path in our algorithm is proportional to  $\lceil \log_4 P \rceil + \lceil \log_2 P \rceil$ . The first term is the time to propagate arrival up to the root, and the second term is the time to propagate wakeup back down to all of the leaves. On a machine with coherent caches and unlimited replication of cache lines, we could replace the wakeup phase of our algorithm with a busy wait on a global flag. We explore this alternative on the Sequent Symmetry in section 4.2.

<sup>5</sup>We use a fan-out of 2 because it results in the the shortest critical path required to resume  $P$  spinning processors for a tree of uniform degree. We use a fan-in of 4 (1) because it produced the best performance in Yew, Tzeng, and Lawrie's experiments [27] with a related technique they call software combining, and (2) because the ability to pack four bytes in a word permits an optimization on many machines in which a parent can inspect status information for all of its children simultaneously at the same cost as inspecting the status of only one. Alex Schäffer and Paul Dietz have pointed out that slightly better performance might be obtained in the wakeup tree by assigning more children to processors near the root.

```

type treenode = record
  wsense : Boolean
  parentpointer : ^Boolean
  childpointers : array [0..1] of ^Boolean
  havechild : array [0..3] of Boolean
  cnotready : array [0..3] of Boolean
  dummy : Boolean      // pseudo-data

processor private vpid : integer
  // a unique "virtual processor" index
processor private sense : Boolean

shared nodes : array [0..P-1] of treenode
  // nodes[vpid] is allocated in shared memory
  // locally-accessible to processor vpid

// for each processor i, sense is initially true
// in nodes[i]:
//   havechild[j] = (4*i+j < P)
//   parentpointer =
//     &nodes[floor((i-1)/4)].cnotready[(i-1) mod 4],
//     or &dummy if i = 0
//   childpointers[0] = &nodes[2*i+1].wsense,
//     or &dummy if 2*i+1 >= P
//   childpointers[1] = &nodes[2*i+2].wsense,
//     or &dummy if 2*i+2 >= P
//   initially,
//     cnotready = havechild and wsense = false

procedure tree_barrier
  with nodes[vpid] do
    repeat until cnotready =
      [false, false, false, false]
    cnotready := havechild // init for next time
    parentpointer^ := false // signal parent
    if vpid != 0
      // not root, wait until parent wakes me
      repeat until wsense = sense
    // signal children in wakeup tree
    childpointers[0]^ := sense
    childpointers[1]^ := sense
    sense := not sense

```

Algorithm 4: A scalable, distributed, tree-based barrier with only local spinning.

## 3 Related Work

In [18] we survey existing spin lock and barrier algorithms, examining their differences in detail and in many cases presenting improvements over previous-published versions. Many of these algorithms appear in the performance results of section 4; we describe them briefly here.

### 3.1 Spin locks

The simplest algorithm for mutual exclusion repeatedly polls a Boolean flag with a `test_and_set` instruction, attempting to acquire the lock by changing the flag from false to true. A processor releases the lock by setting it to false. Protocols based on the so-called `test-and-test_and_set` [25] reduce memory and interconnection network contention by polling with read requests, issuing a `test_and_set` only when the lock appears to be free. Such protocols eliminate contention on cache-coherent machines *while the lock is held* but with  $P$  competing processors can still induce  $O(P)$  network traffic (as opposed to  $O(1)$  for the MCS lock) each time the lock is freed. Alternatively,

a `test_and_set` lock can be designed to pause between its polling operations. Anderson [3] found exponential backoff to be the most effective form of delay; our experiments confirm this result.

A “ticket lock” [18] (analogous to a busy-wait implementation of a semaphore constructed using an eventcount and a sequencer [23]) consists of a pair of counters, one containing the number of requests to acquire the lock, and the other the number of times the lock has been released. A process acquires the lock by performing a `fetch_and_increment` on the request counter and waiting until the result (its *ticket*) is equal to the value of the release counter. It releases the lock by incrementing the release counter. The ticket lock ensures that processors acquire the lock in FIFO order, and reduces the number of `fetch_and_Φ` operations per lock acquisition. Contention is still a problem, but the counting inherent in the lock allows us to introduce a very effective form of backoff, in which each processor waits for a period of time proportional to the difference between the values of its ticket and the release counter.

In an attempt to eliminate contention entirely, Anderson [3] has proposed a locking algorithm that requires only a constant number of memory references through the interconnection network per lock acquisition/release on cache-coherent multiprocessors. The trick is for each processor to use `fetch_and_increment` to obtain the address of a location on which to spin. Each processor spins on a different location, in a different cache line. Anderson’s experiments indicate that his algorithm outperforms a `test_and_set` lock with exponential backoff when contention for the lock is high [3]. A similar lock has been devised by Graunke and Thakkar [11]. Unfortunately, neither lock generalizes to multiprocessors without coherent caches, and both require statically-allocated space *per lock* linear in the number of processors.

### 3.2 Barriers

In the simplest barrier algorithms (still widely used in practice), each processor increments a centralized shared count as it reaches the barrier, and spins until that count (or a flag set by the last arriving processor) indicates that all processors are present. Like the simple `test_and_set` spin lock, such centralized barriers induce enormous amounts of contention. Moreover, Agarwal and Cherian [2] found backoff schemes to be of limited use for large numbers of processors. Our results (see section 4) confirm this conclusion.

In a study of what they call “software combining,” Yew, Tzeng, and Lawrie [27] note that their technique could be used to implement a barrier. They organize processors into groups of  $k$ , for some  $k$ , and each group is assigned to a unique leaf of a  $k$ -ary tree. Each processor performs a `fetch_and_increment` on the count in its group’s leaf node; the last processor to arrive at a node continues upwards, incrementing a count in the node’s parent. Continuing in this fashion, a single processor reaches the root of the tree and initiates a reverse wave of wakeup operations. Straightforward application of software combining suggests the use of `fetch_and_decrement` for wakeup, but we observe in [18] that simple reads and writes suffice. A combining tree barrier still spins on non-local locations, but causes less contention than a centralized counter barrier, since at most  $k - 1$  processors share any individual variable.

Hensgen, Finkel, and Manber [12] and Lubachevsky [17] have devised tree-style “tournament” barriers. In their algorithms, processors start at the leaves of a binary tree. One processor from each node continues up the tree to the next “round” of the tournament. The “winning” processor is statically determined; there is no need for `fetch_and_Φ`. In Hensgen, Finkel, and Manber’s tournament barrier, and in one of two tournament barriers proposed by Lubachevsky, processors spin for wakeup on a single global flag, set by the tournament champion. This technique works well on cache-coherent machines with broadcast and unlimited cache line replication, but does not work well on distributed-memory machines. Lubachevsky presents a second tournament barrier that

employs a tree for wakeup as well as arrival; this barrier will work well on cache-coherent machines that limit cache line replication, but does not permit local-only spinning on distributed-memory machines. In [18] we present a bidirectional tournament barrier (based on Hensgen, Finkel, and Manber's algorithm) that spins only on locally-accessible variables, even on distributed-memory machines. As shown in section 4, however, the resulting barrier is slightly slower than algorithm 4. The latter employs a squatter tree, with processors assigned to both internal and external nodes.

To the best of our knowledge, only one barrier other than our tree or modified tournament achieves the goal of local-only spinning on machines without coherent caches (though its authors did not address this issue). Hensgen, Finkel, and Manber [12] describe a "dissemination barrier" based on their own algorithm for disseminating information in a distributed system, and on an earlier "butterfly barrier" of Brooks [5]. Processors in a butterfly or dissemination barrier engage in a series of symmetric, pairwise synchronizations, with no distinguished latecomer or champion. The dissemination barrier performs  $O(P \log P)$  accesses across the interconnection network, but only  $O(\log P)$  on its critical path. If these accesses contend for a serialized resource such as a central processor-memory bus, then a tree or tournament barrier, with only  $O(P)$  network accesses, would be expected to out-perform it. However, on machines in which multiple independent network accesses can proceed in parallel, our experiments indicate that the dissemination barrier outperforms its competitors by a small constant factor.

## 4 Empirical Performance Results

We have measured the performance of various spin lock and barrier algorithms on the BBN Butterfly 1, a distributed shared memory multiprocessor, and the Sequent Symmetry Model B, a cache-coherent, shared-bus multiprocessor. We were unable to test our reader-writer lock on either of these machines because of the lack of a `compare_and_swap` instruction, though recent experiments on a BBN TC2000 [19] confirm that it scales extremely well. The MCS lock was implemented using the alternative version of `release_lock` from algorithm 2. Anyone wishing to reproduce our results or extend our work to other machines can obtain copies of our C and assembler source code via anonymous ftp from [titan.rice.edu \(/public/scalable\\_synch\)](http://titan.rice.edu/public/scalable_synch).

Our results were obtained by embedding a lock acquisition/release pair or a barrier episode inside a loop and averaging over a large number of operations. In the spin lock graphs, each data point  $(P, T)$  represents the average time  $T$  for an individual processor to acquire and release the lock once, with  $P$  processors competing for access. In the barrier graphs, points represent the average time required for  $P$  processors to achieve a single barrier. Reported values include the overhead of an iteration of the test loop. To eliminate any effects due to timer interrupts or scheduler activity, on the Butterfly all timing measurements were made with interrupts disabled; on the Symmetry, the `tmp_affinity` system call was used to bind processes to processors.

### 4.1 Spin locks

Figure 1 shows the performance on the Butterfly of several spin lock algorithms. (Measurements were made for all numbers of processors; the tick marks simply differentiate between line types.) Figure 2 provides an expanded view of the four best performers, and figure 3 shows analogous results on the Symmetry. Since the Symmetry lacks an atomic `fetch_and_increment` instruction, a ticket lock cannot be readily implemented and Anderson's lock is implemented as he suggests [3], by protecting its data structures with an outer `test_and_set` lock. So long as Anderson's lock is used for critical sections whose length exceeds that of the operations on its own data structures, processors do not seriously compete for the outer lock. In the absence of coherent caches, we

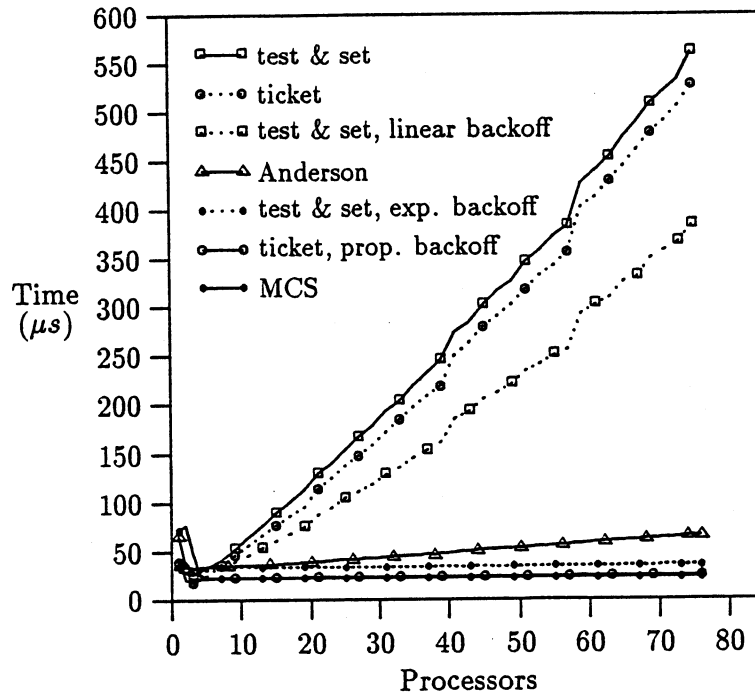


Figure 1: Performance of spin locks on the Butterfly.

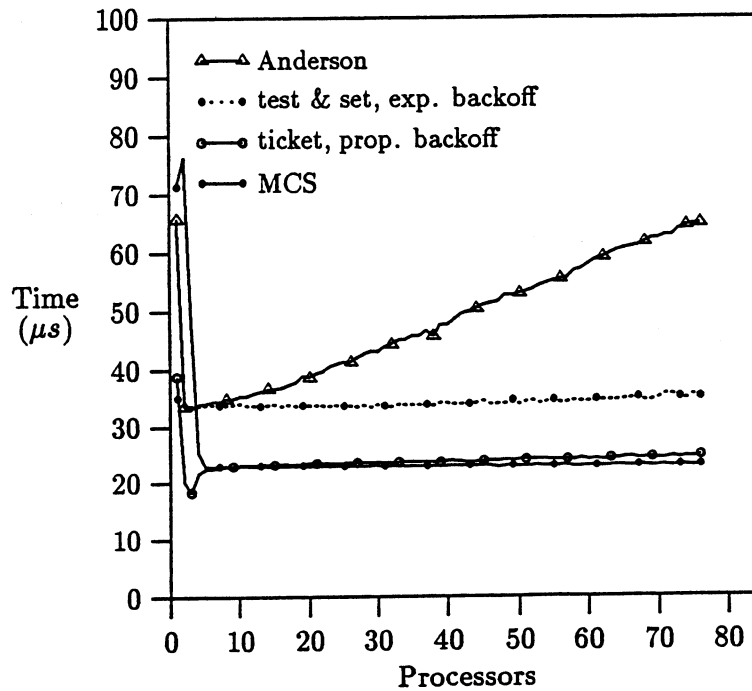


Figure 2: Performance of selected spin locks on the Butterfly.

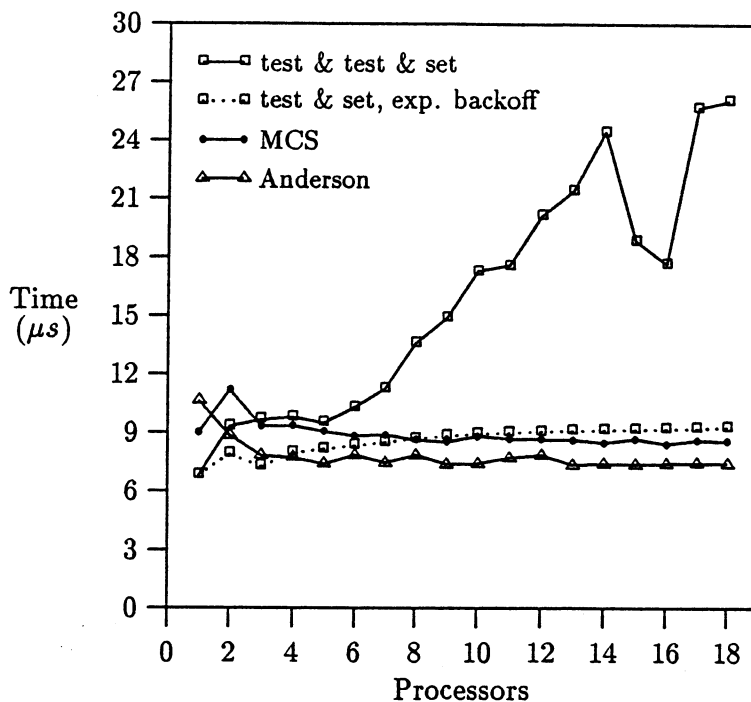


Figure 3: Performance of spin locks on the Symmetry.

modified Anderson's algorithm on the Butterfly to scatter the slots of its array across the available processor nodes. This modification reduces the impact of contention by spreading it throughout the interconnection network and memory.

The top two curves in figure 1 are for simple `test_and_set` and ticket locks without backoff. They scale extremely badly. Most of the concern in the literature over synchronization-induced contention appears to have been based on the behavior represented by the top curve in this graph. Linear backoff in a `test_and_set` lock doesn't help much, but exponential backoff for the `test_and_set` lock and proportional backoff for the ticket lock lead to much better scaling behavior. The MCS lock scales best of all. Figure 2 suggests that these three algorithms would continue to perform well even with thousands of processors competing. The slope of the curve for the MCS lock is  $0.00025 \mu s$  per processor.

In many of the curves, the time to acquire and release a lock in the single processor case is significantly larger than the time required when multiple processors are competing for the lock. The principal reason for this apparent anomaly is that parts of each acquire/release protocol can execute in parallel when multiple processors compete. What we are measuring in our trials with many processors is not the time to execute an acquire/release pair from start to finish, but rather the length of time between consecutive lock acquisitions on separate processors. Complicating matters is that the time required to release an MCS lock depends on whether another processor is waiting.

The peak in the cost of the MCS lock on two processors reflects the lack of `compare_and_swap`. Some fraction of the time, a processor releasing the lock finds that its next variable is `nil` but then discovers that it has a successor after all when it performs its `fetch_and_store` on the lock's tail pointer. Entering this timing window necessitates an additional `fetch_and_store` to restore the state of the queue, with a consequent drop in performance. The longer critical sections on the Symmetry (introduced to be fair to Anderson's lock) reduce the likelihood of hitting the window, thereby reducing the size of the two-processor peak. With `compare_and_swap` that peak would

| Busy-wait Lock                              | Increase in<br>Network Latency<br>Measured From |           |
|---|---|-----------|
|   | Lock Node                                       | Idle Node |
| <code>test_and_set</code>                   | 1420%   | 96%       |
| <code>test_and_set</code> w/ linear backoff | 882%  | 67%       |
| <code>test_and_set</code> w/ exp. backoff   | 32%   | 4%        |
| <code>ticket</code>                         | 992%  | 97%       |
| <code>ticket</code> w/ prop. backoff        | 53%   | 8%        |
| Anderson                                    | 75%   | 67%       |
| MCS   | 4%  | 2%        |

Table 1: Increase in network latency (relative to that of an idle machine) on the Butterfly caused by 60 processors competing for a busy-wait lock.

disappear altogether.

Several factors skew the absolute numbers on the Butterfly, making them somewhat misleading. First, the `test_and_set` lock is implemented completely in line, while the others use subroutine calls. Second, the atomic operations on the Butterfly are inordinately expensive in comparison to their non-atomic counterparts. Third, those operations take 16-bit operands, and cannot be used to manipulate pointers directly. We believe the numbers on the Symmetry to be more representative of actual lock costs on modern machines; our recent experience on the TC2000 confirms this belief. We note that the single-processor latency of the MCS lock on the Symmetry is only 31% higher than that of the simple `test_and_set` lock.

In an attempt to uncover contention not evident in the spin lock timing measurements, we obtained an estimate of average network latency on the Butterfly by measuring the total time required to probe the network interface controller on each of the processor nodes during a spin lock test. Table 1 presents our results in the form of percentage increases over the value measured on an idle machine. In the Lock Node column, probes were made from the processor on which the lock itself resided (this processor was otherwise idle in all our tests); in the Idle Node column, probes were made from another processor not participating in the spin lock test. Values in the two columns are very different for the `test_and_set` and `ticket` locks (particularly without backoff) because competition for access to the lock is focused on a central hot spot, and steals network interface bandwidth from the process attempting to perform the latency measurement on the lock node. Values in the two columns are similar for Anderson's lock because its data structure (and hence its induced contention) is distributed throughout the machine. Values are both similar and low for the MCS lock because its data structure is distributed and because each processor refrains from spinning on the remote portions of that data structure.

## 4.2 Barriers

Figure 4 shows the performance on the Butterfly of several barrier algorithms. The upper three curves represent centralized, counter-based barriers. The top one uses no backoff. The next uses exponential backoff. The third backs off in proportion to the total number of processors in the barrier, with the hope that doing so will not only allow the remaining processors to reach the barrier, but also allow processors that have already arrived to notice that the barrier has been

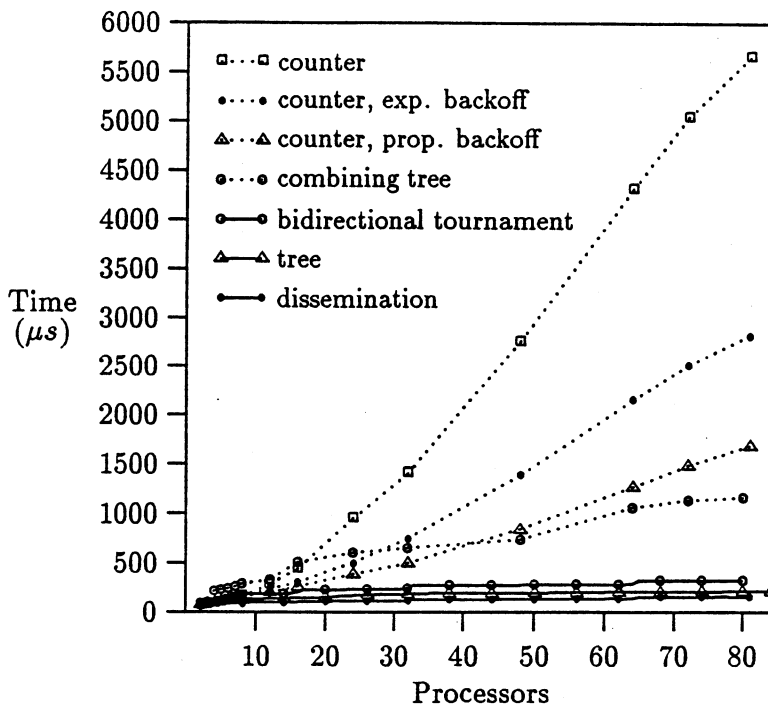


Figure 4: Performance of barriers on the Butterfly.

achieved. At a minimum, these three barriers require time linear in the number of participating processors. The combining tree barrier [27] (modified to avoid `fetch_and_Φ` operations during wakeup [18]) appears to perform logarithmically, but it still spins on remote locations, and has a large enough constant to take it out of the running.

Timings for the three most scalable algorithms on the Butterfly appear in expanded form in figure 5. The dissemination barrier [12] performs best, followed by our tree barrier (algorithm 4), and by Hensgen, Finkel, and Manber’s tournament barrier [12] (with our code [18] for wakeup on machines lacking broadcast—see section 3). All three of these barriers scale logarithmically in the number of participating processors, with reasonable constants.

The comparative performance of barriers on the Symmetry is heavily influenced by the presence of coherent caches. Figure 6 presents results for the dissemination, tree, and tournament barriers (this time with the original wakeup flag for the tournament), together with two other algorithms that capitalize on the caches. One is a simple centralized barrier; the other combines the arrival phase of our tree barrier with a central wakeup flag. Since the bus-based architecture of the Symmetry serializes all network accesses, each algorithm’s scaling behavior is ultimately determined by the number of network accesses it requires. The dissemination barrier requires  $O(P \log P)$ ; each of the other algorithms requires only  $O(P)$ . Our experiments show that the arrival tree outperforms even the counter-based barrier for more than 16 processors; its  $O(P)$  writes are cheaper than the latter’s  $O(P)$  `fetch_and_Φ` operations.

### 4.3 The Importance of Local Shared Memory

Because our software techniques can eliminate contention by spinning on locally-accessible locations, they argue in favor of architectures in which shared memory is physically distributed or coherently cached. On “dance hall” machines, in which shared memory must always be accessed through the processor-memory interconnect, we see no way to eliminate synchronization-related contention in software (except perhaps with a very high latency mechanism based on interprocessor messages or



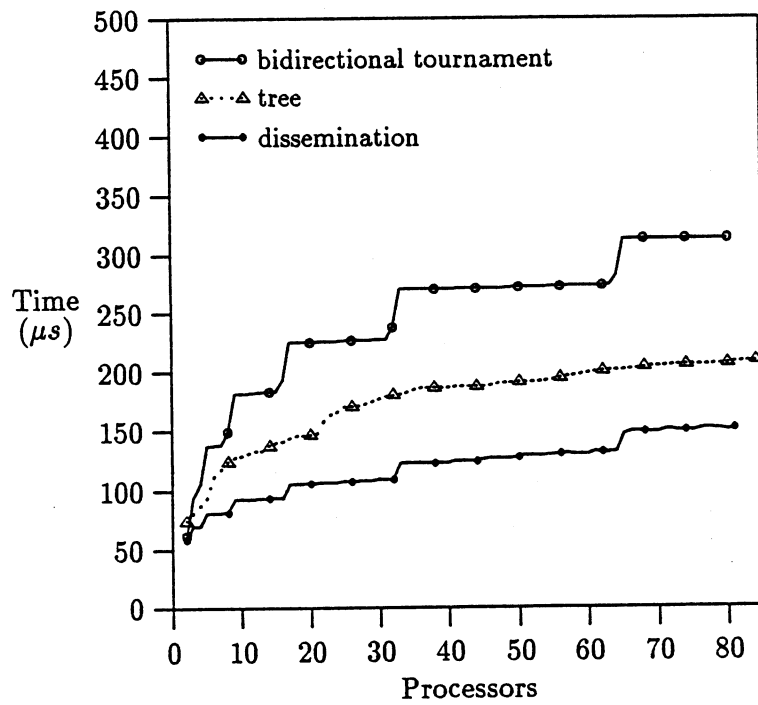


Figure 5: Performance of selected barriers on the Butterfly.

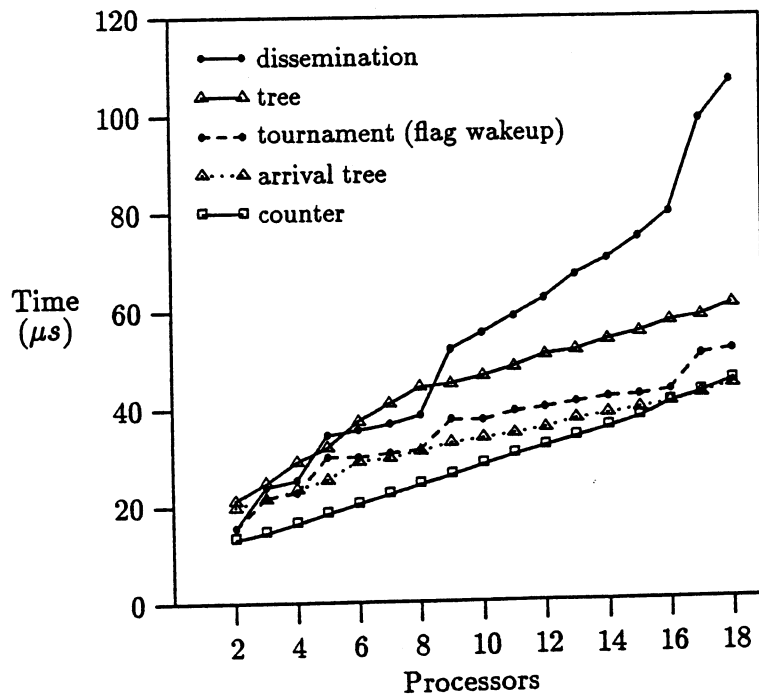


Figure 6: Performance of barriers on the Symmetry.

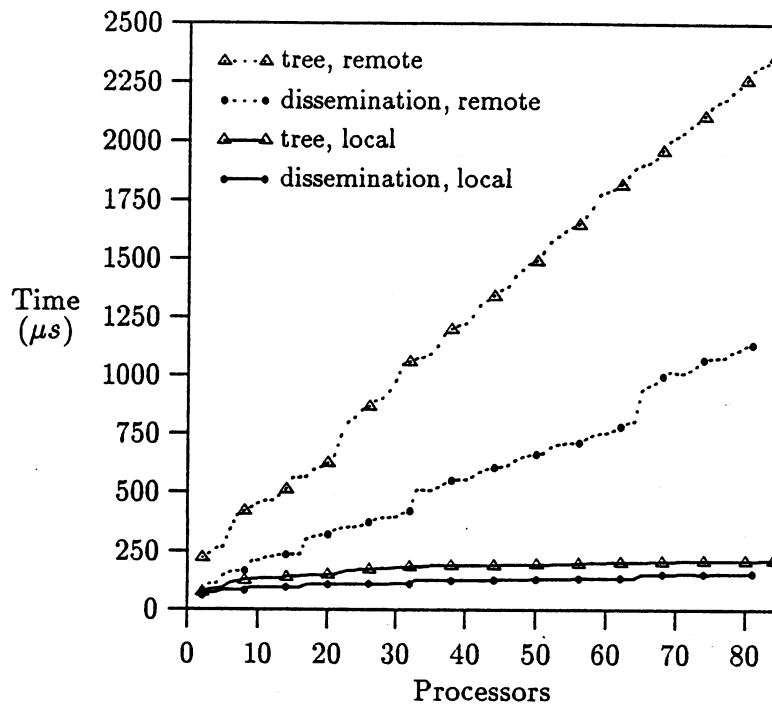


Figure 7: Performance of tree and dissemination barriers on the Butterfly with and without local access to shared memory.

For future shared-memory multiprocessors, our results argue in favor of providing distributed memory or coherent caches, rather than dance-hall memory without coherent caches (as in Cedar, the Monarch, or the Ultracomputer). Our results also indicate that combining networks for such machines must be justified on grounds other than the reduction of synchronization overhead. We strongly suggest that future multiprocessors include a full set of `fetch_and_Φ` operations (especially `fetch_and_store` and `compare_and_swap`).

## References

- [1] S. V. Adve and M. D. Hill. Weak ordering—a new definition. In *Proceedings of the International Symposium on Computer Architecture*, pages 2–14, May 1990.
- [2] A. Agarwal and M. Cherian. Adaptive backoff synchronization techniques. In *Proceedings of the International Symposium on Computer Architecture*, pages 396–406, May 1989.
- [3] T. E. Anderson. The performance implications of spin-waiting alternatives for shared-memory multiprocessors. In *Proc. 1989 Int'l. Conf. on Parallel Processing*, pages II-170–II-174, Aug. 1989.
- [4] BBN Laboratories. Butterfly parallel processor overview. Technical Report 6148, Version 1, BBN Laboratories, Cambridge, MA, Mar. 1986.
- [5] E. D. Brooks III. The butterfly barrier. *International Journal of Parallel Programming*, 15(4):295–307, 1986.
- [6] E. D. Brooks III. The shared memory hypercube. *Parallel Computing*, 6:235–245, 1988.
- [7] P. J. Courtois, F. Heymans, and D. L. Parnas. Concurrent control with ‘readers’ and ‘writers’. *Communications of the ACM*, 14(10):667–668, Oct. 1971.
- [8] K. Gharachorloo, D. Lenoski, J. Laudon, P. Gibbons, A. Gupta, and J. L. Hennessy. Memory consistency and event ordering in scalable shared-memory multiprocessors. In *Proceedings of the International Symposium on Computer Architecture*, pages 15–26, May 1990.
- [9] J. R. Goodman, M. K. Vernon, and P. J. Woest. Efficient synchronization primitives for large-scale cache-coherent multiprocessors. In *Proceedings of the Third International Conference on Architectural Support for Programming Languages and Operating Systems*, pages 64–75, Apr. 1989.
- [10] A. Gottlieb, R. Grishman, C. P. Kruskal, K. P. McAuliffe, L. Rudolph, and M. Snir. The NYU Ultracomputer — Designing an MIMD shared memory parallel computer. *IEEE Transactions on Computers*, C-32(2):175–189, Feb. 1983.
- [11] G. Graunke and S. Thakkar. Synchronization algorithms for shared-memory multiprocessors. *Computer*, 23(6):60–69, June 1990.
- [12] D. Hensgen, R. Finkel, and U. Manber. Two algorithms for barrier synchronization. *International Journal of Parallel Programming*, 17(1):1–17, 1988.
- [13] M. Herlihy. A methodology for implementing highly concurrent data structures. In *Proceedings of the Second ACM Symposium on Principles and Practice of Parallel Programming*, pages 197–206, Mar. 1990.
- [14] D. N. Jayasimha. Distributed synchronizers. In *Proceedings of the 1988 International Conference on Parallel Processing*, pages 23–27, Aug. 1988.
- [15] C. P. Kruskal, L. Rudolph, and M. Snir. Efficient synchronization on multiprocessors with shared memory. In *Proceedings of the Fifth ACM Symposium on Principles of Distributed Computing*, pages 218–228, 1986.
- [16] J. Lee and U. Ramachandran. Synchronization with multiprocessor caches. In *Proceedings of the International Symposium on Computer Architecture*, pages 27–37, May 1990.
- [17] B. Lubachevsky. Synchronization barrier and related tools for shared memory parallel programming. In *Proceedings of the 1989 International Conference on Parallel Processing*, pages II-175–II-179, Aug. 1989.
- [18] J. M. Mellor-Crummey and M. L. Scott. Algorithms for scalable synchronization on shared-memory multiprocessors. Technical Report 342, Computer Science Department, University of Rochester, Apr. 1990. Also COMP TR90-114, Department of Computer Science, Rice University, May 1990.
- [19] J. M. Mellor-Crummey and M. L. Scott. Scalable reader-writer synchronization for shared-

- memory multiprocessors. In *Proceedings of the Third ACM Symposium on Principles and Practice of Parallel Programming*, Apr. 1991.
- [20] P1596 Working Group of the IEEE Computer Society Microprocessor Standards Committee. SCI (scalable coherent interface): An overview of extended cache-coherence protocols, Feb. 5, 1990. Draft 0.59 P1596/Part III-D.
  - [21] G. Pfister et al. The IBM research parallel processor prototype (RP3): Introduction and architecture. In *Proceedings of the 1985 International Conference on Parallel Processing*, pages 764–771, Aug. 1985.
  - [22] G. F. Pfister and V. A. Norton. “Hot spot” contention and combining in multistage interconnection networks. *IEEE Transactions on Computers*, C-34(10):943–948, Oct. 1985.
  - [23] D. P. Reed and R. K. Kanodia. Synchronization with eventcounts and sequencers. *Communications of the ACM*, 22(2):115–123, Feb. 1979.
  - [24] R. D. Rettberg, W. R. Crowther, P. P. Carvey, and R. S. Tomlinson. The Monarch parallel processor hardware design. *Computer*, 23(4):18–30, Apr. 1990.
  - [25] L. Rudolph and Z. Segall. Dynamic decentralized cache schemes for MIMD parallel processors. In *Proceedings of the International Symposium on Computer Architecture*, pages 340–347, 1984.
  - [26] P.-C. Yew. Architecture of the Cedar parallel supercomputer. CSRD report 609, Center for Supercomputing Research and Development, University of Illinois at Urbana-Champaign, Aug. 1986.
  - [27] P.-C. Yew, N.-F. Tzeng, and D. H. Lawrie. Distributing hot-spot addressing in large-scale multiprocessors. *IEEE Transactions on Computers*, C-36(4):388–395, Apr. 1987.